

SENSIBLE+ MONITOR INSTRUCTION MANUAL

know what you breathe

CONTACT

Address

706, 7th floor, Crown heights, Rohini Sec-10, New delhi-110085, India Phone


73918-73918


Online

Email : info@purelogic.in Website : www.pranaair.com

GETTING STARTED

KNOW YOUR SENSIBLE+

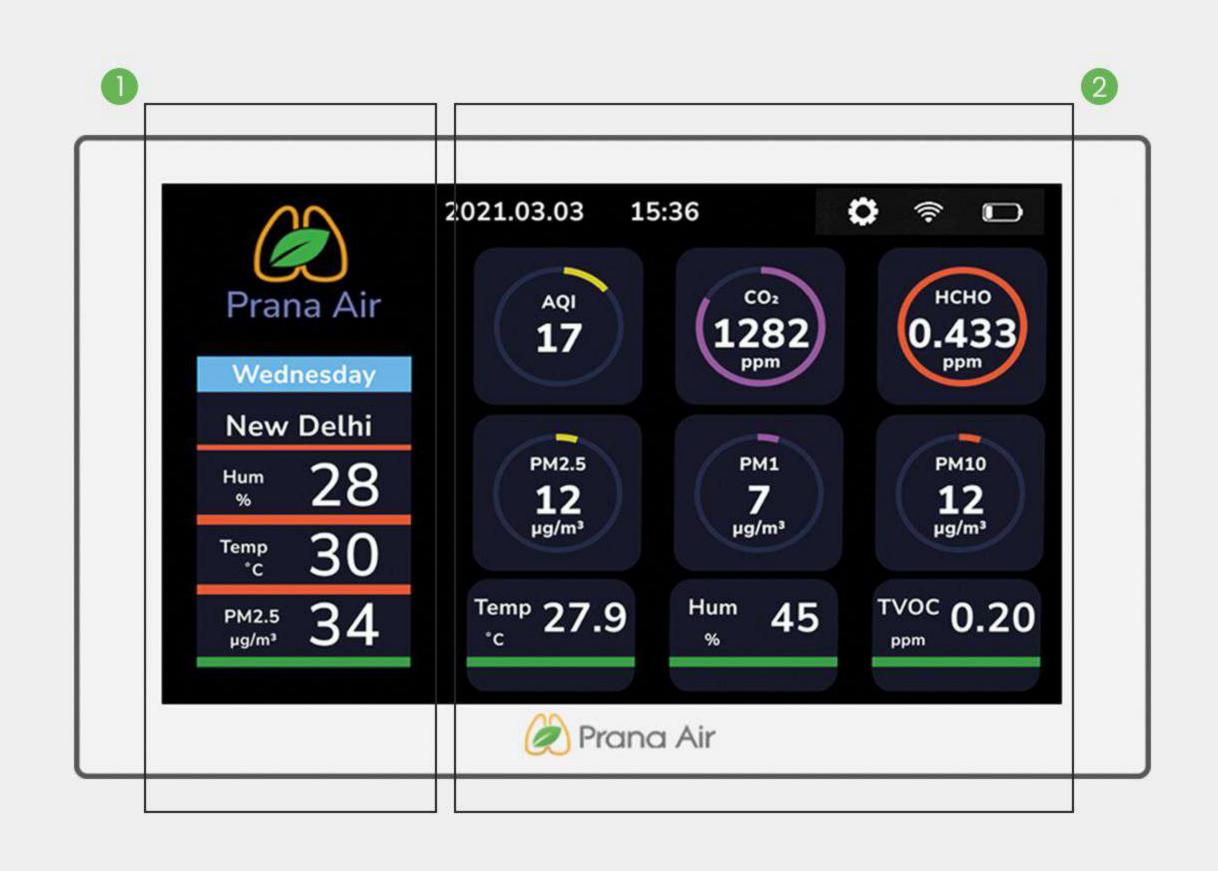

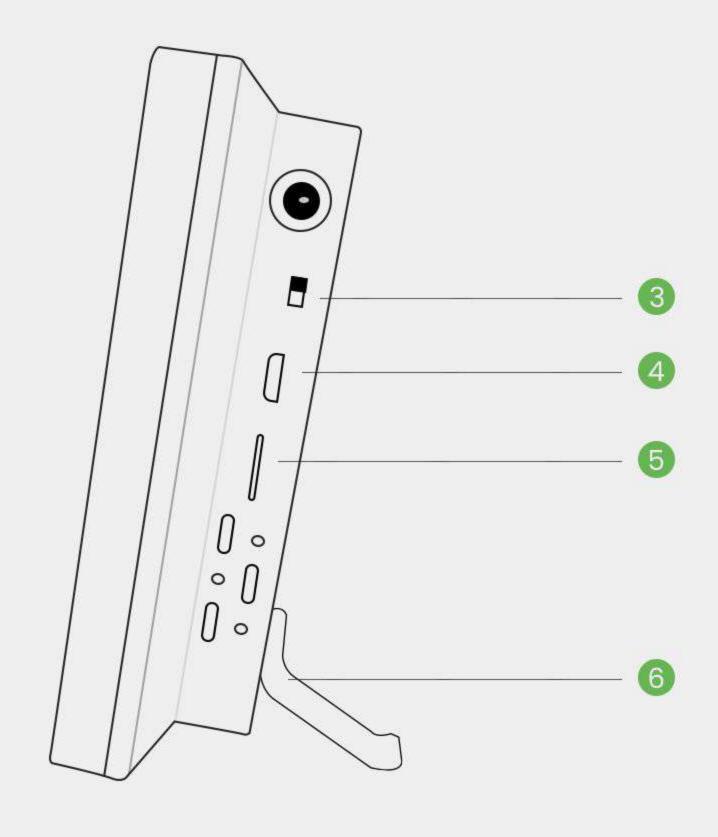

For your reference:

- 1. Outdoor air quality data
- 4. 5V DC Type-C Power supply
- 2. Indoor air quality data
- 5. Micro SD Card slot

- 3. ON/OFF Switch
- 6. Table Mount


HOW TO

CONNECT

Connect the monitor to a power source with the cable and adapter.



Search for "Air monitor_(your device id)" network in your phone's Wi-Fi settings and connect to it with password "12345678"

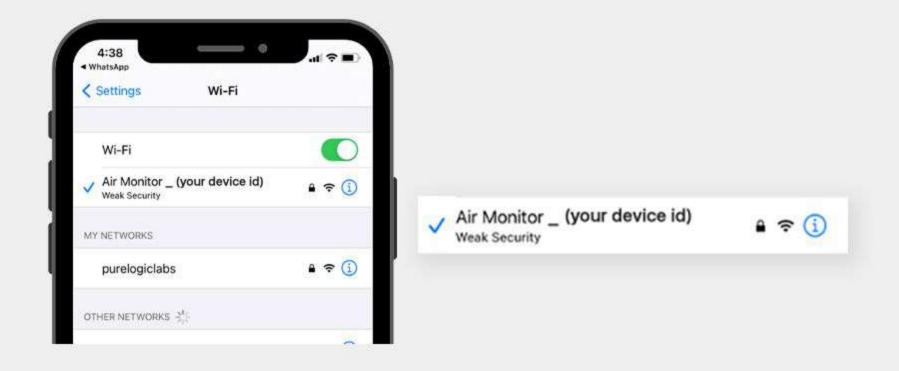

Click on the Wi-Fi icon and a pop-up will appear with the IP Address and your device ID (as shown below).




Open your browser and type "192.168.4.1" in the address bar. SSID: Select the wifi you want your SENSIBLE+ to connect.




HOW TO

CONNECT


Open AQI App on your phone and create an account or simply log in if you already have one. Go to my devices and select SSENSIBLE+ from the given options.

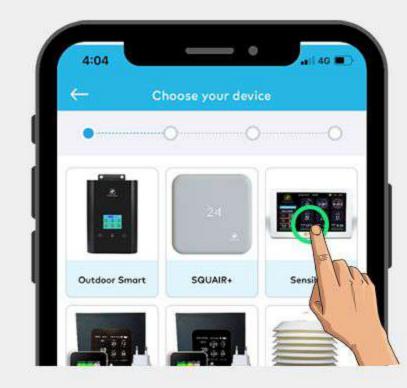

Your device is now connected successfully, the data will be shown in the AQI dashboard.

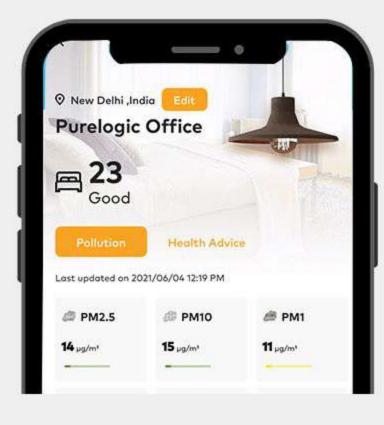

Enter the Device ID printed on the back side of SENSIBLE+ or scan the QR code printed there. Configure the device name of your choice.

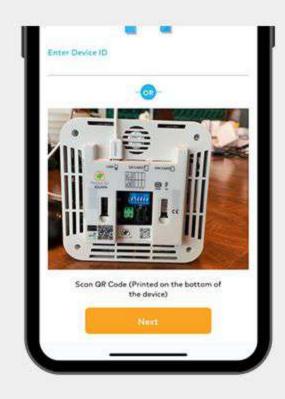

Place your Sensible+ Monitor anywhere inside your home, office, restaurant etc.





Visit us:

www.pranaair.com